

rotronic

Datenblatt - Fiche technique - Data sheet




ROLINE FTP-Patchkabel konf. Kat.5e

ROLINE Câble patch FTP conf. Cat.5e


ROLINE FTP Patch Cord Cat.5e

RoHS COMPLIANT

DATE	REV.	REVISION	DRAFTING	CHECKED
	A/0			

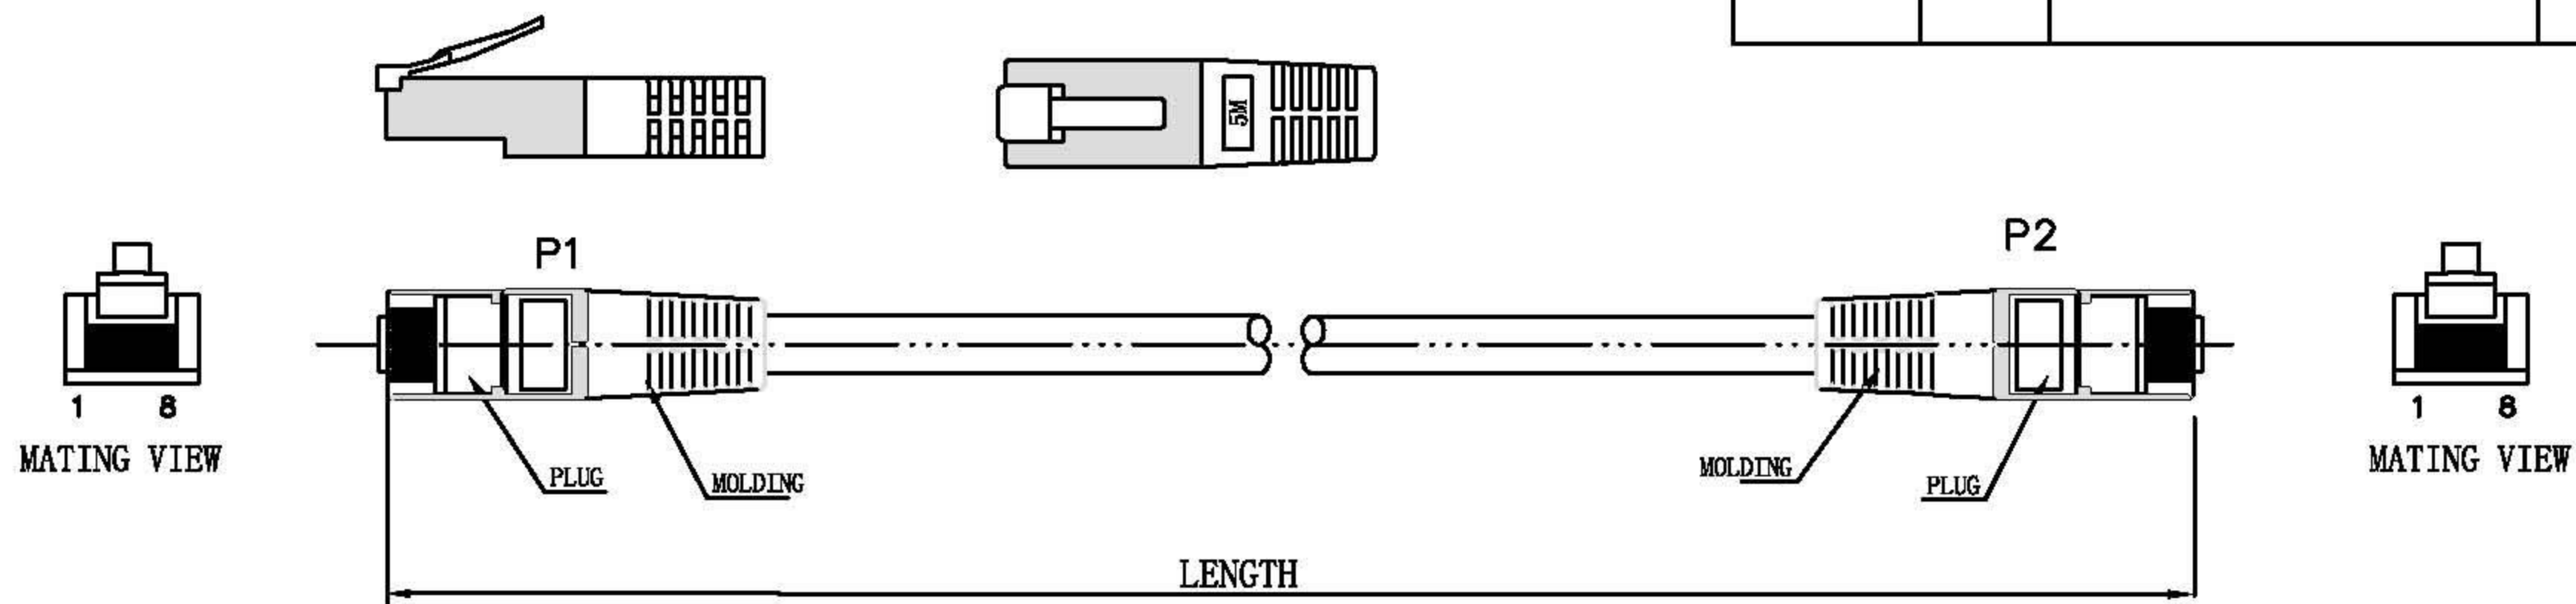

Marking: **roline FTP CAT.5E PATCH ISO/IEC 11801 & EN 50288 ▲ 26AWGX4P TYPE CMX(UL) c(UL) CMH E164469-F3 (FP0570)**

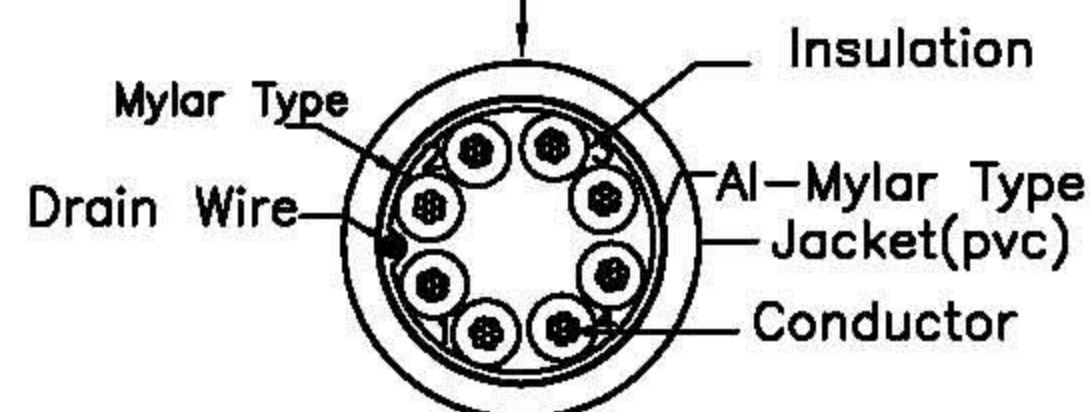

orange 2 white/orange	green 3 white/green
blue 1 white/blue	brown 4 white/brown

note:
Min. Bending radius(after installation) $\geq 25\text{MM}$

Conductor	Bare Copper 26AWG
Insulation	Thickness:MIN at any point:0.15mm MAX AVG:0.25mm Diameter:0.85 \pm 0.06mm
Jacket	PVC
	Thickness:MIN at any point:0.50mm MAX AVG:0.60mm Diameter:5.6 \pm 0.2mm

Wire	CAT. 5E FTP STR 26AWG*4P
Plug	YUS-06 8P8C 50U"
Length	5000 \pm 20MM
Color	GY825

PA/R	PINOUT		
	P1 (T568B)	WIRE	P2 (T568B)
1	1	WHT/ORG	1
	2	ORG	2
2	3	WHT/GRN	3
	6	GRN	6
3	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8

Rotronic Co.,Ltd

ROLINE Cat. 5e FTP Patch Cable, 5m, grey

Item No.: 21.15.0105	DATE	2012/01/30
SCALE	CHECKER	DATE
UNIT	MM	SHEET
3RD	1	OF 1

Unless specified on the drawing, tolerances are per the follows:

.X	± 1
.XX	± 0.2
.XX	± 0.05

